

Supreme 400 Single Auger

[Read More](#)

SKU:

Price:

Stock: instock


Categories: [All Equipment](#), [Supreme TMR Feed Mixer Wagons](#)

Tags: [mixer](#), [supreme](#)



Product Description

A Supreme Feed Processor helps you provide nutritious rations for your cattle by improved mix quality through superior tub and auger design. Along with great ROI from your feedstuffs, a Supreme Feed Processor provides a great investment as it holds high resale value. You enjoy the reliability you need from a well-built machine made with quality components. The 400 Pull-Type has a maximum payload of 10,000 lbs (4,536kg), struck capacity of 320 ft³ (9.1 m³) or 378 ft³ (10.7 m³) with tub extension, and requires 60 horse power (45 kW). Unlike most other vertical mixers that use smaller single stage planetary drives, Supreme uses the heaviest two-stage planetary drive available. Combined with a heavy duty gearbox, this robust system rotates the auger through the toughest of materials. This simple design features few moving parts with no chains, sprockets or couplings. A large variety of options available.

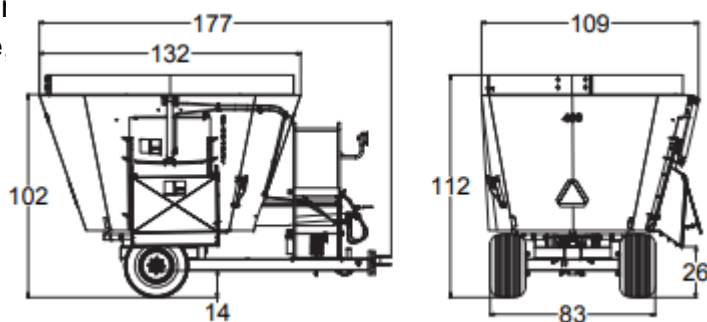

needs. [Download Information](#)

Minimum Power Requirements: 60 hp / 45 kW

Unit Capacity: **Struck Capacity:** 320 ft³ / 9.1 m³, Capacity with Extension: 378 ft³ / 10.7 m³

Tires: 19 x 45 x 17 Flotation Implement Tires

Empty Weight: 6,400 lbs / 2,903 kg

Max Payload: 10,000 lbs / 4,536 kg

Dimensions: Height: 102" / 259 cm, Height w/ 10" Extension: 112" / 284 cm, Overall Width: 109" / 277 cm, Overall Length : 177" / 450 cm

Drive / rpm PTO: 2-Stage Heavy-Duty Planetary Drive / 540 rpm PTO

Standard Discharge Ground Clearance: Fixed Chute: 26" / 66 cm, 21" Fixed; 35" / 89 cm, 36" Folding: 42" / 107 cm, 44" Folding: 45" / 114 cm

Number of Knives : 4 Replaceable Forage Cutting Blades

Conveyor: Left or Right Hand Side Door with Drop Chute

Floor Thickness: 5/8" / 16 mm M/S Floor

Wall Thickness: 1/4" / 6 mm AR200 Walls

Standards Specifications: Patented Freestanding Vertical Mixing Auger, Manual Restrictor Plates, Heavy-Duty Tubular Steel Frame, 5/8" / 16 mm AR200 Auger Flighting, 3 pt Scale System, 12 Volt Battery, Ultra Wear Kicker Plate, SS Conveyor Top Pan on Conveyor Models, Steel Oil Reservoir, Removable Hitch Jack, Viewing Platform
